

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 12/28</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/14898</b> (43) International Publication Date: 25 March 1999 (25.03.99)
<p>(21) International Application Number: PCT/SE98/01646</p> <p>(22) International Filing Date: 15 September 1998 (15.09.98)</p> <p>(30) Priority Data: 08/932,244 17 September 1997 (17.09.97) US</p> <p>(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).</p> <p>(72) Inventor: HAARTSEN, Jacobus; Doddegras 29, NL-7623 DK Borne (NL).</p> <p>(74) Agent: ERICSSON MOBILE COMMUNICATIONS AB; Patent Unit, S-164 80 Stockholm (SE).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: CONTEMPORANEOUS CONNECTIVITY TO MULTIPLE PICONETS

## (57) Abstract

A first wireless unit engages in contemporaneous participation in a plurality of wireless networks. A connection is established with a second wireless unit in a first wireless network. Then, a hold time-out period is determined, and the first wireless unit enters a hold mode with respect to the first wireless network. While in hold mode, the first wireless unit establishes a connection with a third wireless unit in a second wireless network. This may include the first wireless unit paging the third wireless unit and acting as a master unit in the second wireless network. Alternatively, the first wireless unit may periodically listen for paging messages from a master unit, and respond when paged, thereby becoming a slave in the second wireless network. The first wireless unit then participates in activities in the second wireless network. Upon expiration of the hold time-out period, the first wireless unit resumes active participation in the first wireless network. This may include determining a second hold time-out period to be used in connection with the second wireless network, and entering a hold mode with respect to the second wireless network.

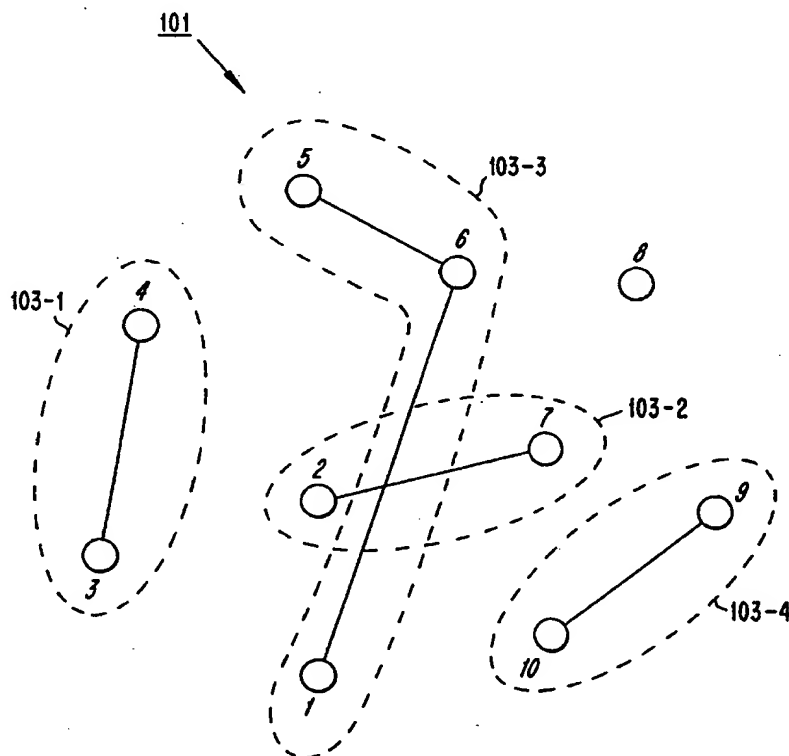

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

**CONTEMPORANEOUS CONNECTIVITY TO MULTIPLE PICONETS****BACKGROUND**

5           The present invention relates to self-organized connectivity in an uncoordinated wireless multi-user system, and more particularly, to techniques for enabling a wireless unit to contemporaneously be a member of multiple independently operating self-organized wireless local area networks.

10           The piconets together form a network having a scatter topology, in which only those units that indeed want to share information share the same piconet. This topology is illustrated in FIG. 1, in which the network 101 comprises a number of piconets 103-x. Each piconet 103-x comprises a subset of the wireless units 1, . . . , 10. The piconets 103-x are self-organized in the sense that only those wireless units 1, . . . , 10 that want to communicate with each other are in any given piconet 103-x.  
15           For example, only units 3 and 4 are in the first piconet 103-1, and only units 1, 5 and 6 are in a third piconet 103-3. The wireless unit 8 is not required to communicate with any of the other units 1, . . . , 7, 9, 10, and is therefore not a member of any of the piconets 103-x.

20           All piconets make use of the same radio medium. This radio medium however is divided into a large number of subchannels, each centered around a certain carrier frequency. All units in the same piconet synchronously hop from one channel to the next channel. Because different piconets use different pseudo-random hopping sequences, interference immunity is obtained by frequency hopping through a sequence  
25           of channels selected in, for example, the 2.4 GHz band. In each piconet, one of the wireless units is designated as a master and the remaining units are slaves. The frequency hopping sequence for each piconet is a function of the master unit's address. The phase within the selected hopping sequence is a function of the master's free-running clock. Information about the master's address and clock is communicated to  
30           each slave when a connection between the master and the slave is first established.

-2-

When a slave is not engaged in communication, it is preferably in an idle mode. In U.S. Patent Application No. 08/771,692, filed December 23, 1996 in the name of Haartsen et al. and entitled "Access Technique of Channel Hopping Communications System," which is hereby incorporated herein by reference, techniques are described for enabling a master to page and thereby "awaken" an idle slave in a frequency hopping system by using the address and clock estimate of the recipient.

In U.S. Patent Application No. 08/685,069 (Attorney Docket No. 27951/00059 EUS00390-RCUR), entitled "Short-Range Radio Communications System and Method of Use", which was filed on July 23, 1996 in the name of Paul W. DENT and Jacobus C. HAARTSEN, which is commonly assigned to the same assignee as that of the present application, and which is hereby incorporated herein by reference, an air-interface is described for this frequency hopping system, optimized to support both voice and data communications. Two units that communicate hop in synchrony. A time division duplex (TDD) scheme is applied to obtain full-duplex communications. The TDD frame comprises a transmit (TX) slot and a receive (RX) slot. For each slot, a different hop frequency is used according to the frequency hopping sequence. Only a single packet can be sent per slot. Different links can co-exist in the same area, each link having its own random hopping sequence. If two links happen to collide, an immediate retransmission of data in the next TDD frame takes place.

The air-interface in the above-referenced U.S. Patent Application No. 08/685,069 (Attorney Docket No. 27951/00059 EUS00390-RCUR) has been optimized for point-to-point configurations. However, limited point-to-multipoint configurations can be established. In this case, a star configuration is used with a master in the center, which is connected to several slaves. Master and slaves are time synchronized, and together perform frequency hopping. That is, the master sends packets in one slot of the TDD frame and all slaves listen. In the next slot, one slave can respond and the master listens. To avoid collisions of transmissions by several slaves simultaneously, a polling scheme is used in which only a slave that is addressed by the master in the master TX slot is allowed to respond in the master RX slot. The master and the slaves

-3-

form a piconet. As mentioned above, the frequency hopping sequence used in the piconet is determined by the master address, and the phase in the sequence is determined by the master clock. Because all units have free running clocks, the clock in each slave is temporarily adjusted with an offset to provide a clock value identical to the master clock. Because the master addresses and clocks differ in each piconet, each piconet has its own frequency hopping sequence and phase therein. Consequently, several piconets can co-exist in close proximity to one another.

As described in the above-referenced documents, once a master or slave has joined a piconet, there is no provision for enabling it to communicate with another, co-existing piconet. This restriction can detrimentally limit the utility of piconet technology.

### SUMMARY

It is therefore an object of the present invention to provide techniques for enabling wireless units to contemporaneously participate in communications taking place in more than one piconet at a time.

The foregoing and other objects are achieved in a method and apparatus for operating a first wireless unit to contemporaneously participate in a plurality of wireless networks. In one aspect of the invention, this may include establishing a connection with a second wireless unit in a first wireless network and, at some point, determining a hold time-out period and entering a hold mode with respect to the first wireless network. Then, the first wireless unit establishes a connection with a third wireless unit in a second wireless network, and participates in activities in the second wireless network. Upon expiration of the hold time-out period, the first wireless unit resumes active participation in the first wireless network.

In another aspect of the invention, the act of resuming active participation in the first wireless network includes determining a second hold time-out period to be used in connection with the second wireless network, and entering a hold mode with respect to the second wireless network. In this way, the strategy is that

-4-

while a wireless unit is actively participating in one wireless network, it may be on hold in one or more other wireless networks.

In still another aspect of the invention, the act of establishing the connection with the third wireless unit in the second wireless network includes  
5 transmitting a paging message that includes an address of the third wireless unit, receiving a response from the third wireless unit, and establishing the connection with the third wireless unit. In this way, the first wireless unit may be a master in the second wireless network.

In yet another aspect of the invention, the act of establishing the  
10 connection with the third wireless unit in the second wireless network includes entering a standby mode for a predetermined period of time, and periodically determining whether a paging message has been received that designates the first wireless unit as recipient. If the paging message has been received that designates the first wireless unit as recipient, then the first wireless unit sends a response to the sender of the  
15 paging message and establishes a connection with the sender of the paging message. In this way, the first wireless unit may be a slave in the second wireless network.

In still another aspect of the invention, the first wireless unit is a slave in the first wireless network; and the act of determining a hold time-out period includes mutually agreeing upon the hold time-out period with the second wireless unit.

20 In another aspect of the invention, the first wireless unit may be a master in the first wireless network; and the act of determining a hold time-out period includes mutually agreeing upon a hold time-out period with every slave wireless unit in the first wireless network.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

The objects and advantages of the invention will be understood by reading the following detailed description in conjunction with the drawings in which:

FIG. 1 is a diagram of a wireless network having a scatter topology consisting of several piconets for use with the invention;

-5-

FIG. 2 is a diagram of a wireless unit that contemporaneously participates in piconets in accordance with the invention; and

FIGS. 3a and 3b together are a high-level flowchart depicting exemplary operations of a wireless unit in accordance with the invention.

5

### DETAILED DESCRIPTION

The various features of the invention will now be described with respect to the figures, in which like parts are identified with the same reference characters.

The present invention enables wireless units to contemporaneously participate in more than one of a number of co-existing piconets. This is made possible by means of a so-called "hold mode" that can be implemented using the air-interface as described in the above-referenced U.S. Patent Application No. 08/685,069 (Attorney Docket No. 27951/00059 EUS00390-RCUR). While in hold mode, a link enters a hold state in which the two or more communicating parties keep their clocks running in synchrony, but do not physically exchange packets. After an agreed time-out period, each of the units leaves the hold mode, returns to the active mode and exchanges some data. This exchange of data enables each unit to readjust its clock to counteract clock drifts. If there is no further information to be exchanged, the units can agree on a new time-out period and enter the hold mode again. In this way, the several units do not have to disconnect if there is temporarily no information to be exchanged, nor do they need to transmit idle packets. Thus, a unit in hold mode can reduce its own power consumption while simultaneously avoiding contributing interference to communications taking place between other units.

While a unit in hold mode may remain idle, this is not a requirement. In accordance with one aspect of the invention, a unit in hold mode in a first piconet uses this time to connect to a different (e.g., second) piconet. In the second piconet the unit can act as master or slave, depending on how the piconet was configured. For example, a master going into hold mode in a first piconet can enter a second piconet as a slave unit, using a different address and clock offset (corresponding to the second piconet's master). There is little purpose for a leaving master to enter the second

30

-6-

piconet as a master because, in that case, both first and second piconets would be completely synchronized and used the same address. This would be regarded as a single piconet.

5 A slave unit leaving the first piconet can enter the second piconet as a slave (using the second piconet master's address and clock offset), or as a master, in which case the second piconet's address and clock are the same as that of the unit itself.

In accordance with another aspect of the invention, upon expiration of the time-out period in the first piconet, a unit has to agree on a hold time-out in the second piconet, and then return to the first piconet. In a preferred embodiment, this  
10 operation is not time-critical because after a hold mode the awakened master sends repeated packets to the awakened slave, and the slave merely listens. Master and slave will continue to do so until communications are re-established and a new hold time-out has been agreed upon.

In yet another aspect of the invention, the above-described procedure is  
15 extended to more than two piconets. In fact, a unit can jump from one piconet to another using the piconet's address and piconet's offset: the offset added to the unit's internal clock renders the piconet's clock.

In addition to the addresses and clock offsets, there is a hold time-out for each piconet, so that the unit knows when to return to a previous piconet. For a master  
20 to leave a piconet, it has to put all the slaves into hold mode. When the hold time-out expires, all slaves wake up and listen to hear from the master. They do not transmit anything, but instead keep listening until the master returns and polls one or more slaves.

For a slave to leave a piconet, all that is required is for it to agree with  
25 the master on what the hold time-out period will be. If the time-out period has expired, the master might want to poll the slave. If the slave has not yet returned to the piconet, the master may retransmit the packet until the slave has returned and responded. Alternatively, the master may poll a different slave. If the polling of a particular slave fails for too many polls in a row, the slave may be disconnected under the assumption  
30 that a link failure may have occurred.

-7-

In another aspect of the invention, if a master or slave unit enters a hold mode but does not wish to resume activity in or create another piconet, it may instead remain in a standby state in which it scans for pages. In this case, the unit can be connected as a slave by a master in another piconet. A master can add slaves in its own piconet at any time.

With the procedure as described above, a unit can be virtually connected to many other units in different piconets. The only restriction is that it cannot communicate in all of these piconets simultaneously. The time-out value for the hold periods in other piconets determines how long a unit can dwell in a current piconet.

The above-described techniques will be illustrated by way of example with reference to FIG. 2. Consider three piconets A, B and C, each with its own address (which defines the hopping sequence) and its own clock (which defines the phase in the sequence). Assume that a unit X contemporaneously participates as a slave in all three piconets. In order to do this, the unit X maintains the information shown in the following table:

Piconet Address	Clock Offset	Master/Slave Status	Timeout Value
address_A	clock_offset_A	MS_A	timeout_A
address_B	clock_offset_B	MS_B	timeout_B
address_C	clock_offset_B	MS_C	timeout_C

The first column of the table contains the address of each piconet A, B, C. This address is used to determine the frequency hopping sequence and possibly the packet identifier (preamble). In the second column is a clock offset value which, when added to the internal clock of unit X, yields the master clock for the corresponding piconet. For example:  $\text{clock\_offset\_A} = \text{clock\_A} - \text{clock\_X}$ . As explained above, the master clock determines the phase in the piconet's frequency hopping sequence and also the timing in the TDD scheme used in the piconet. In a preferred embodiment, unit

-8-

X's internal clock is free running and is never reset to match any particular master clock value. Instead, a calculation using the unit X's own internal clock and the offset value is always performed in order to derive a present master clock value.

5 In the third column, a parameter is set that tells unit X whether it is a master or a slave in the corresponding piconet. As explained earlier, the unit X can be a master or slave in any number of piconets. However, if unit X is a master in all of the piconets, then the piconets essentially merge into one piconet, since each will be using the same address and clock values (i.e., those corresponding to "master" unit X).

10 Listed in the fourth column is the time-out value for the hold mode that unit X agreed upon with the master of the corresponding piconet. All values in the fourth column are adjusted (e.g., decremented) at a fixed rate, for example the frame rate. In the exemplary embodiment, the time-out value of the piconet that unit X is currently participating in is zero or a negative value. When another time-out value approaches zero, unit X can agree with the current master to enter the hold mode and  
15 can then jump to the piconet whose time-out value has reached zero. After the jump, the unit X can resume the communications in the new piconet. If there has been some clock drift, unit X can adjust the clock-offset parameter in the table.

In another aspect of the invention, the unit X can then estimate the drift for the next time. Using the absolute difference due to drift and the hold period over  
20 which it happened, a gradient can be calculated that can be used to estimate the drift difference after a following hold time.

FIGS. 3a and 3b together are a high-level flowchart depicting exemplary operations of a wireless unit in accordance with the invention. In this example, the unit is presumed to be participating in a first piconet, designated piconet A (step 301). At  
25 some point, it is decided to enter a hold mode (step 303). If the unit is a master in piconet A, this means agreeing on a hold time-out value with each of the other units that are slaves in piconet A. Alternatively, if the unit is, itself, a slave, then entering a hold mode entails agreeing on a hold time-out value with the master unit of piconet A.

The subsequent operations depend on what the next desired action is  
30 (decision block 305). If the unit is to remain idle, then it enters a standby mode (step

-9-

307). Periodically, the unit checks to see whether the piconet A time-out period has expired (decision block 309). So long as the time-out period has not expired, the unit re-enters the standby mode ("NO" path out of decision block 309). If the piconet A time-out period has expired ("YES" path out of decision block 309), then the unit  
5 leaves the standby mode and resumes its participation in piconet A (step 311).

Alternatively, if the unit is to become a master of a new piconet, then execution branches from decision block 305 to step 313, in which the unit sends paging messages to one or more target slave units, and establishes connections for a new piconet, designated piconet B.

10 Having established the necessary connections in piconet B, the unit (acting as master) participates in piconet B (step 315). Periodically, the unit must check to see whether the piconet A time-out period has expired (or nearly expired (decision block 317). So long as the piconet A time-out period has not expired ("NO" path out of decision block 317), the unit continues to participate in piconet B (step  
15 315). Upon expiration (or near expiration) of the piconet A time-out period ("YES" path out of decision block 317), the unit comes to an agreement with all of the piconet B slave units as to a hold time-out period for piconet B (step 319). (Alternatively, of course, the unit, acting as master, could simply break all connections with its slave units, thereby disintegrating piconet B.)

20 After entering a hold mode in piconet B, the unit can then resume participation in piconet A (step 321). The unit must periodically check for expiration of the piconet B time-out period, and switch piconets at an appropriate time.

If, at the time of entering hold mode in piconet A, the unit had already established itself as a master of piconet B, then it may be unnecessary to perform the  
25 steps of sending paging messages and establishing connections with slave units in piconet B. Instead, the unit's operation can proceed directly from decision block 305 to step 315, where operations are performed as described above.

In yet another alternative, after entering hold mode in piconet A, the unit may be willing to become a participant in another piconet without, itself, becoming a  
30 master. In this case, the unit's operation proceeds from decision block 305 to step 323,

-10-

in which the unit enters a standby period for a predetermined period of time. Upon expiration of the predetermined period, the unit checks to see whether any paging messages have been received that designate it as the recipient (decision block 325). If the unit has not been paged ("NO" path out of decision block 325), then the unit checks  
5 to see whether the piconet A time-out period has expired yet (decision block 327). If the time-out period has not expired ("NO" path out of decision block 327), then operation continues back at step 323, in which standby mode is entered for a predetermined period of time.

If the piconet A time-out period has expired ("YES" path out of decision  
10 block 327), then the unit will resume participation in piconet A (step 329). The unit has not become a member of any other piconets at this point, so no other housecleaning steps need to be taken.

If, however, a paging message directed at this unit was received ("YES" path out of decision block 325), then the unit will establish a connection with the  
15 master unit that sent the paging message (step 331). Once the connection is established, the unit may then continue execution at step 315 as a participant in piconet B. The remaining steps are as described above.

Referring back again to decision block 305, if, at the time of entering hold mode in piconet A, the unit had already established itself as a slave in piconet B,  
20 then it may be unnecessary to perform the steps of monitoring to determine whether a new paging message has been received. Instead, the unit's operation can proceed directly from decision block 305 to step 315, where operations are performed as described above.

The above example has been simplified in order to facilitate an  
25 understanding of the invention. Those having ordinary skill in the art will recognize that other scenarios would require modification to the steps shown above. For example, the unit's participation in piconet B could, itself, include entering a hold mode, and optionally becoming a participant in one or more additional piconets (e.g., piconets, C, D, . . .). This scenario would require, among other things, the inclusion

-11-

of steps to agree on and subsequently monitor additional time-out periods, one for each piconet in which the unit is a participant in hold mode.

The invention has been described with reference to a particular embodiment. However, it will be readily apparent to those skilled in the art that it is possible to embody the invention in specific forms other than those of the preferred embodiment described above. This may be done without departing from the spirit of the invention. The preferred embodiment is merely illustrative and should not be considered restrictive in any way. The scope of the invention is given by the appended claims, rather than the preceding description, and all variations and equivalents which fall within the range of the claims are intended to be embraced therein.

-12-

## WHAT IS CLAIMED IS:

1. A method of operating a first wireless unit to contemporaneously participate in a plurality of wireless networks, the method comprising the steps of:  
establishing a connection with a second wireless unit in a first wireless  
5 network;  
determining a hold time-out period;  
entering a hold mode with respect to the first wireless network;  
establishing a connection with a third wireless unit in a second wireless  
network;  
10 participating in activities in the second wireless network; and  
upon expiration of the hold time-out period, resuming active  
participation in the first wireless network.
2. The method of claim 1, wherein the step of resuming active participation  
15 in the first wireless network includes the steps of:  
determining a second hold time-out period to be used in connection with  
the second wireless network; and  
entering a hold mode with respect to the second wireless network.
- 20 3. The method of claim 1, wherein the step of establishing the connection  
with the third wireless unit in the second wireless network includes the steps of:  
transmitting a paging message that includes an address of the third  
wireless unit;  
receiving a response from the third wireless unit; and  
25 establishing the connection with the third wireless unit, whereby the first  
wireless unit is a master in the second wireless network.
4. The method of claim 1, wherein the step of establishing the connection  
with the third wireless unit in the second wireless network includes the steps of:  
30 entering a standby mode for a predetermined period of time;

-13-

periodically determining whether a paging message has been received that designates the first wireless unit as recipient; and

if the paging message has been received that designates the first wireless unit as recipient, then sending a response to the sender of the paging message and  
5 establishing a connection with the sender of the paging message, whereby the first wireless unit is a slave in the second wireless network.

5. The method of claim 1, wherein:

the first wireless unit is a slave in the first wireless network; and  
10 the step of determining a hold time-out period includes mutually agreeing upon the hold time-out period with the second wireless unit.

6. The method of claim 1, wherein:

the first wireless unit is a master in the first wireless network; and  
15 the step of determining a hold time-out period includes mutually agreeing upon a hold time-out period with every slave wireless unit in the first wireless network.

7. A first wireless unit for contemporaneously participating in a plurality of  
20 wireless networks, the first wireless unit comprising:

means for establishing a connection with a second wireless unit in a first wireless network;

means for determining a hold time-out period;

means for entering a hold mode with respect to the first wireless  
25 network;

means for establishing a connection with a third wireless unit in a second wireless network;

means for participating in activities in the second wireless network; and

means for resuming active participation in the first wireless network  
30 upon expiration of the hold time-out period.

-14-

8. The first wireless unit of claim 7, wherein the means for resuming active participation in the first wireless network includes:

means for determining a second hold time-out period to be used in connection with the second wireless network; and

5 means for entering a hold mode with respect to the second wireless network.

9. The first wireless unit of claim 7, wherein the means for establishing the connection with the third wireless unit in the second wireless network includes:

10 means for transmitting a paging message that includes an address of the third wireless unit;

means for receiving a response from the third wireless unit; and

means for establishing the connection with the third wireless unit, whereby the first wireless unit is a master in the second wireless network.

15

10. The first wireless unit of claim 7, wherein the means for establishing the connection with the third wireless unit in the second wireless network includes:

means for entering a standby mode for a predetermined period of time;

20 means for periodically determining whether a paging message has been received that designates the first wireless unit as recipient; and

means for sending a response to the sender of the paging message and establishing a connection with the sender of the paging message if the paging message has been received that designates the first wireless unit as recipient, whereby the first wireless unit is a slave in the second wireless network.

25

11. The first wireless unit of claim 7, wherein:

the first wireless unit is a slave in the first wireless network; and

the means for determining a hold time-out period includes means for mutually agreeing upon the hold time-out period with the second wireless unit.

30

-15-

12. The first wireless unit of claim 7, wherein:

the first wireless unit is a master in the first wireless network; and

the means for determining a hold time-out period includes means for

mutually agreeing upon a hold time-out period with every slave wireless unit in the first

5 wireless network.

FIG. 1

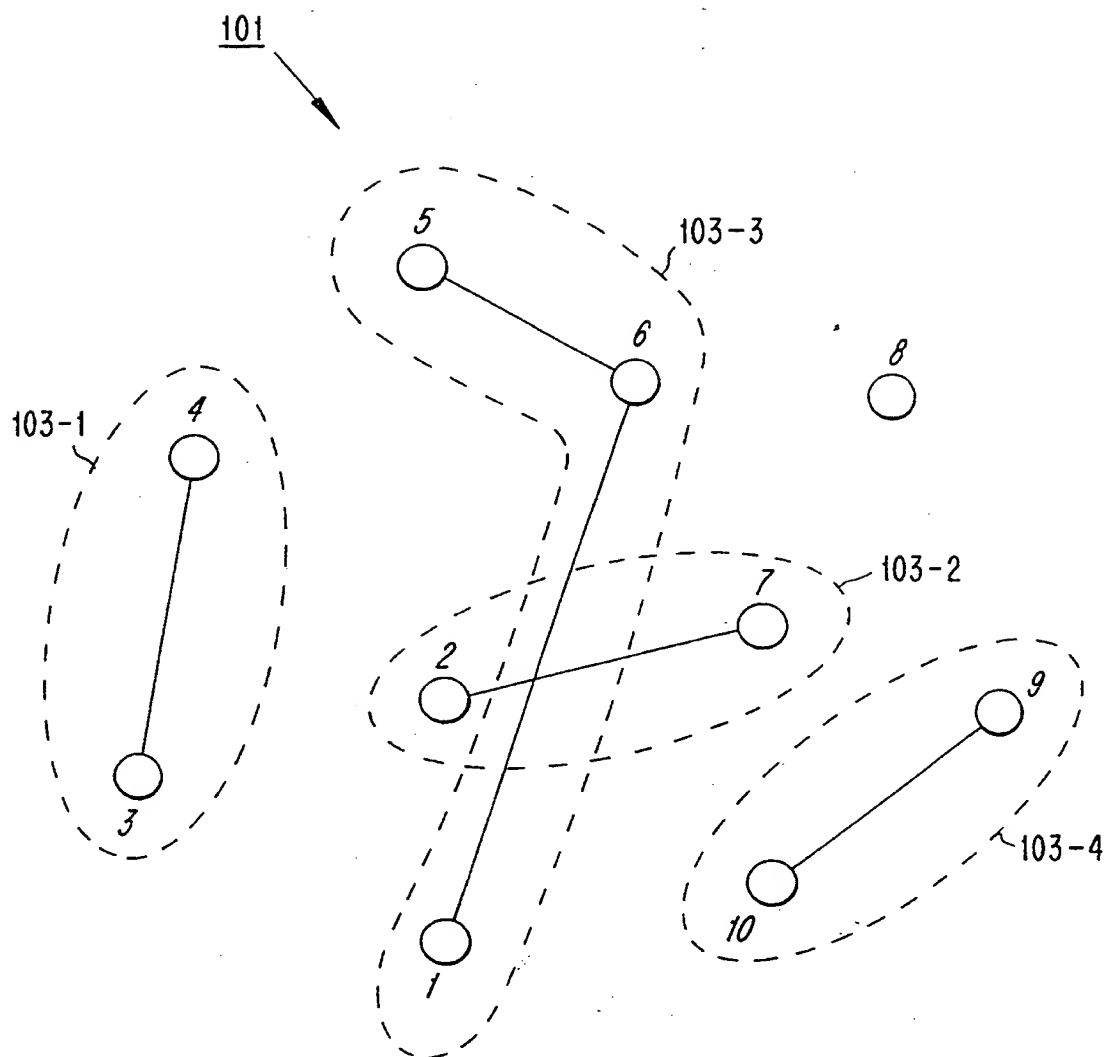
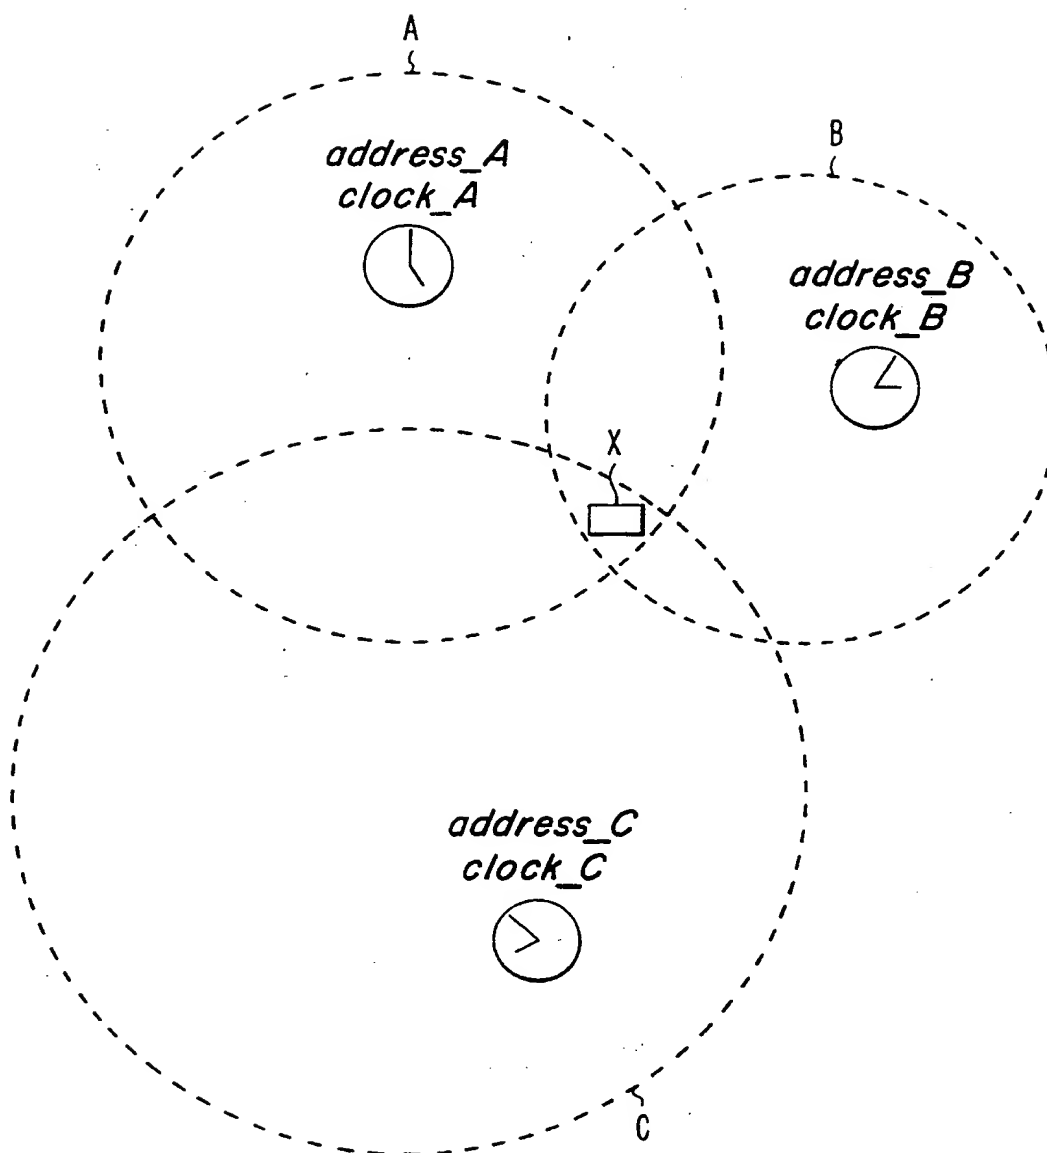


FIG. 2




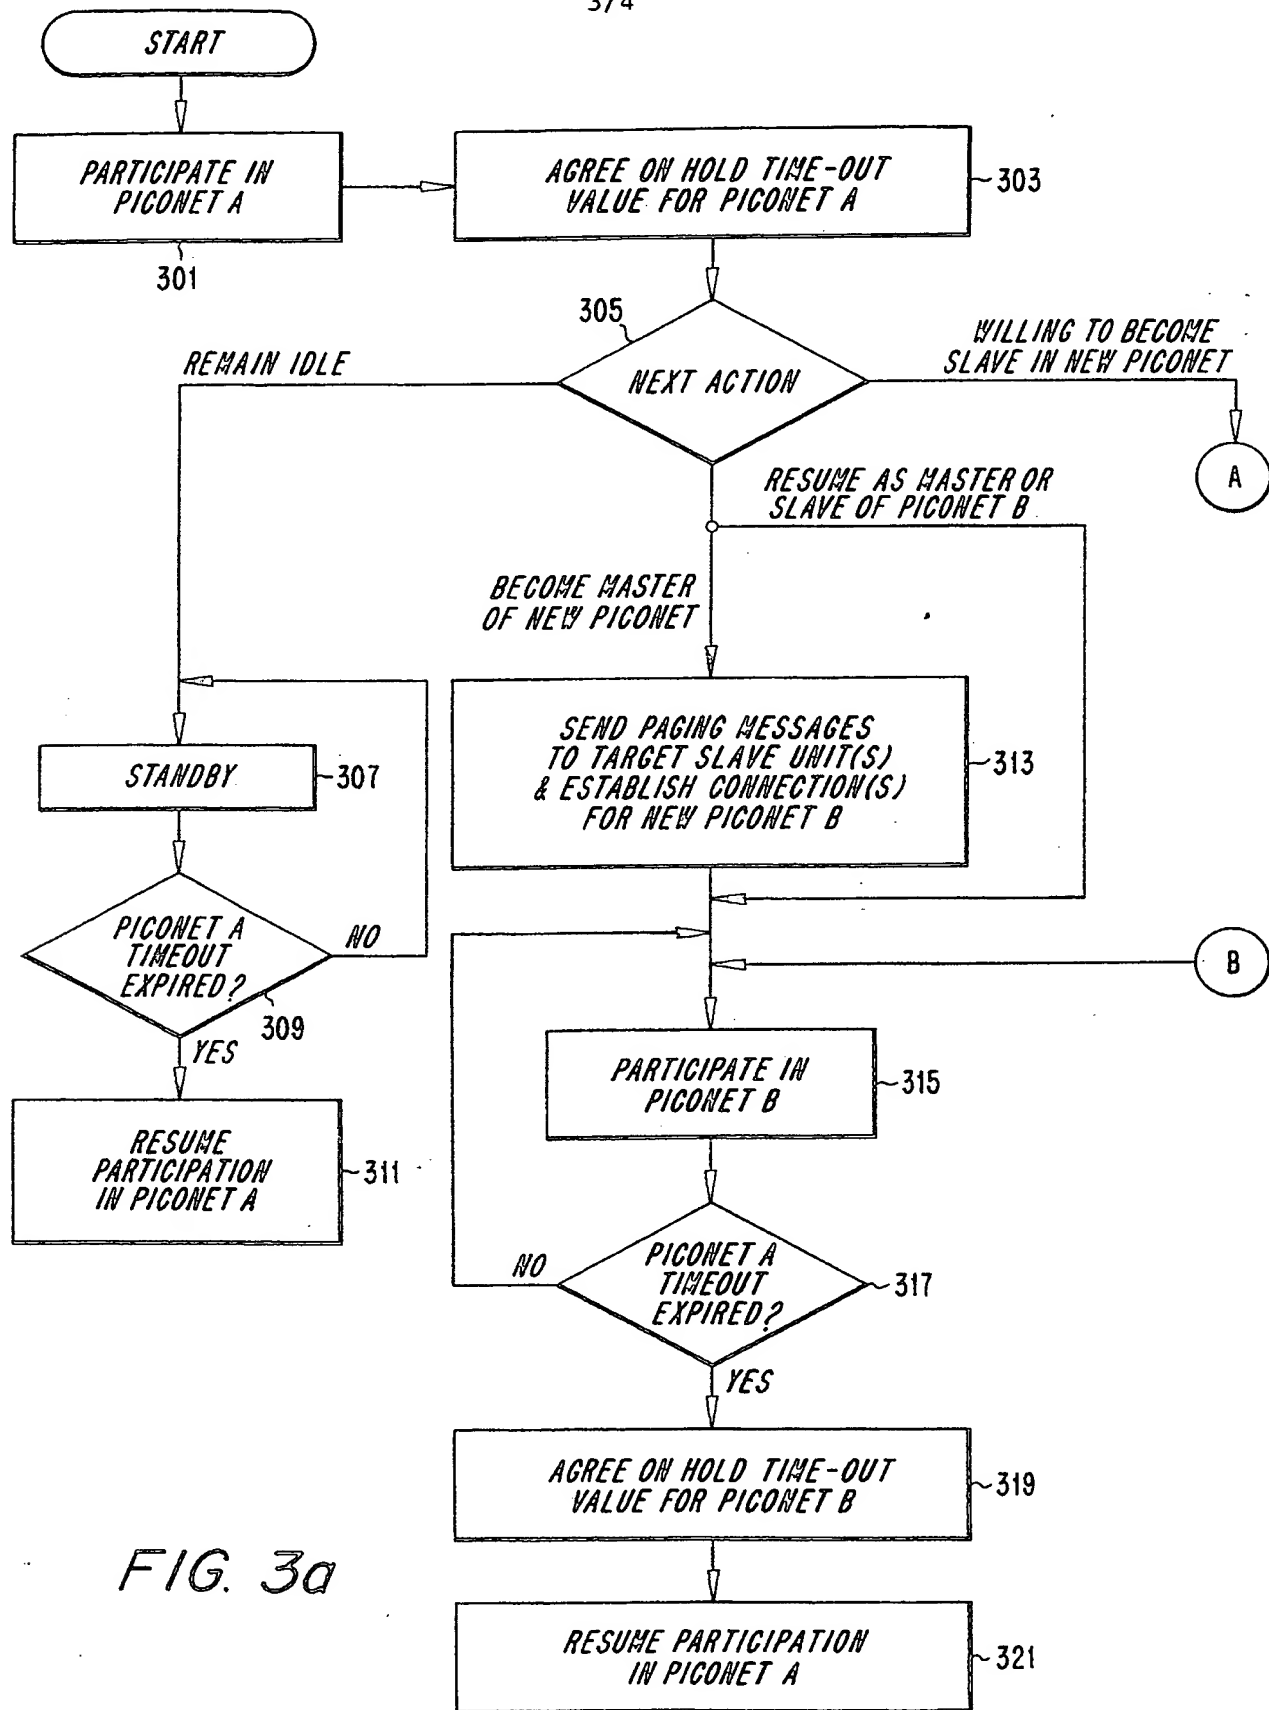


FIG. 3b

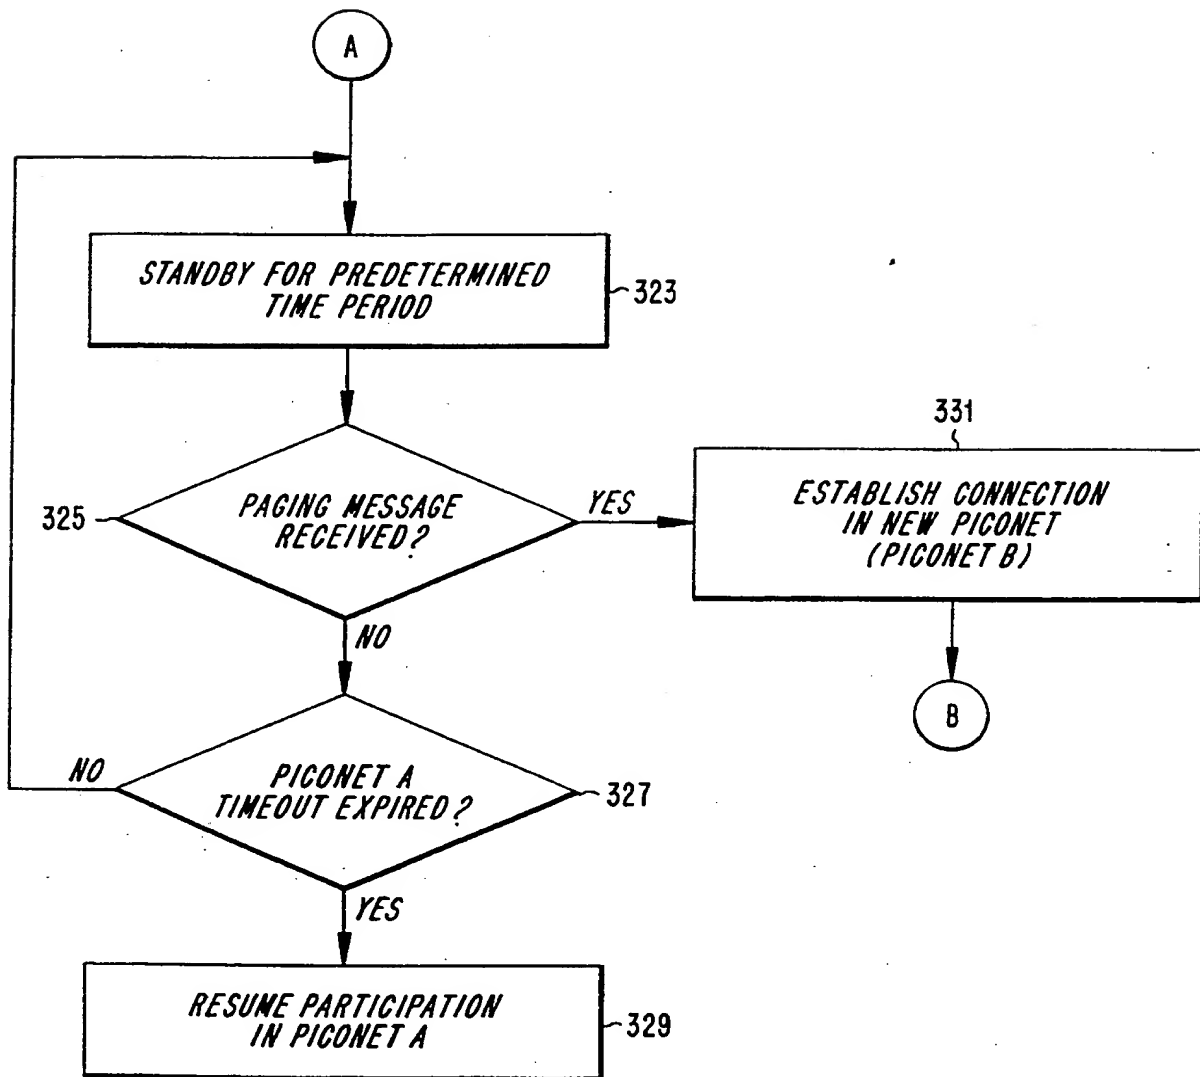

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/SE 98/01646

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H04L H04M H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 664 007 A (SAMADI BEHROKH ET AL) 2 September 1997 see abstract see column 1, line 56 - column 9, line 43 ---	1,7
A	US 5 666 364 A (PIERCE JENNIFER A ET AL) 9 September 1997 see column 2, line 1 - line 54 ---	1,7
A	EP 0 735 789 A (AT & T CORP) 2 October 1996 see column 1, line 11 - column 3, line 5 see column 4, line 41 - column 5, line 43 see column 7, line 37 - column 8, line 23 see column 20, line 42 - column 21, line 25 see column 24, line 7 - line 43 ---	1,7
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

4 January 1999

Date of mailing of the international search report

20/01/1999

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vaskimo, K

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 98/01646

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 546 382 A (FUJINO NOBUTSUGU)  13 August 1996  see column 1, line 6 - column 2, line 17  see column 5, line 42 - column 7, line 58  see column 8, line 59 - column 9, line 9  see column 19, line 15 - column 21, line 20</p>	1,7
A	<p>WO 96 09731 A (ACCESSLINE TECHNOLOGIES INC  ;FULLER ROBERT M (US); BERG RICHARD P)  28 March 1996  see page 4, line 1 - page 6, line 21  see page 19, line 14 - page 20, line 28  see page 24, line 20 - line 30  see page 56, line 11 - line 25</p>	1,7
A	<p>US 5 617 539 A (LUDWIG LESTER F ET AL)  1 April 1997  see column 2, line 41 - column 4, line 4  see column 18, line 19 - line 34  see column 23, line 21 - column 24, line 39  see column 36, line 36 - line 62  see column 38, line 5 - line 37  see column 39, line 3 - line 46  see column 40, line 13 - line 22</p>	1,7

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/01646

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5664007	A	02-09-1997	NONE		
US 5666364	A	09-09-1997	NONE		
EP 0735789	A	02-10-1996	US	5666399 A	09-09-1997
			AU	5032696 A	10-10-1996
			CA	2167442 A	01-10-1996
			JP	8289352 A	01-11-1996
US 5546382	A	13-08-1996	JP	7123174 A	12-05-1995
WO 9609731	A	28-03-1996	US	5752191 A	12-05-1998
			AU	3727195 A	09-04-1996
			CA	2200682 A	28-03-1996
			EP	0784907 A	23-07-1997
			JP	10510684 T	13-10-1998
US 5617539	A	01-04-1997	US	5689641 A	18-11-1997
			AU	7198894 A	01-05-1995
			AU	7963894 A	01-05-1995
			CA	2173204 A	13-04-1995
			CA	2173209 A	13-04-1995
			CA	2204442 A	13-04-1995
			EP	0721725 A	17-07-1996
			EP	0721726 A	17-07-1996
			GB	2282506 A,B	05-04-1995
			GB	2319135 A,B	13-05-1998
			GB	2319136 A,B	13-05-1998
			GB	2319137 A,B	13-05-1998
			GB	2319138 A,B	13-05-1998
			WO	9510157 A	13-04-1995
			WO	9510158 A	13-04-1995
			US	5802294 A	01-09-1998
			US	5758079 A	26-05-1998